



1080P Smart Floodlight Camera

Quick Start Guide - EN



Model: HGFLC-890

iGET HOMEGUARD 2021

✉ www.iget.eu/cs/helpdesk-centrum-cs

📄 <https://helpdesk.intelek.cz>



What's included



Floodlight Camera



Bracket



Disc bracket



Screws



Screwdriver & Pin



Wire nuts




Waterproof terminal





Quick Start Guide

Parts & Function

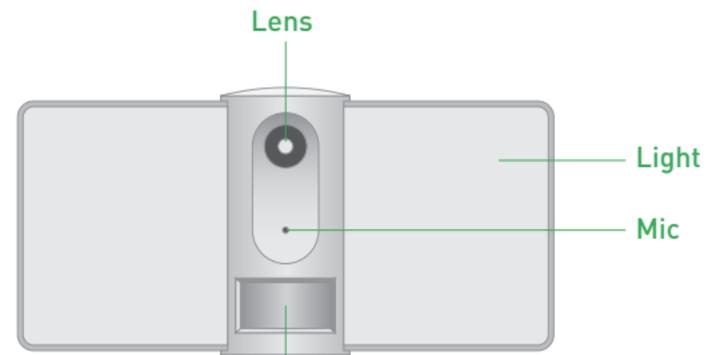

PIR & Status light

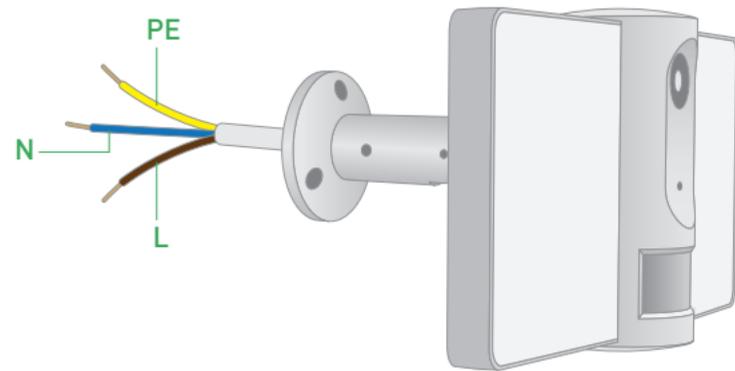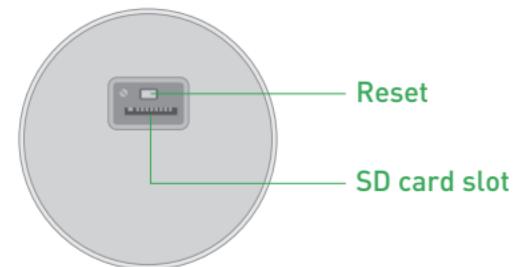


Description

Item	Description
Power	AC 100~240V
Status light	Solid red light on: the camera network is abnormal Blinking red light: awaiting WiFi connecting Solid blue light on: camera running correctly Blinking blue light: currently connecting
Microphone	Capture sounds for your video
SD card slot	Support local SD Card storage (Max.128G)
Reset	Press and hold the 'reset' for 5 seconds to reset the device(if you have modified settings, they will return to factory defaults)
Light	Turn the light on/off manually or automatically



Install

1 Connect the wire & fix the disc bracket to the wall

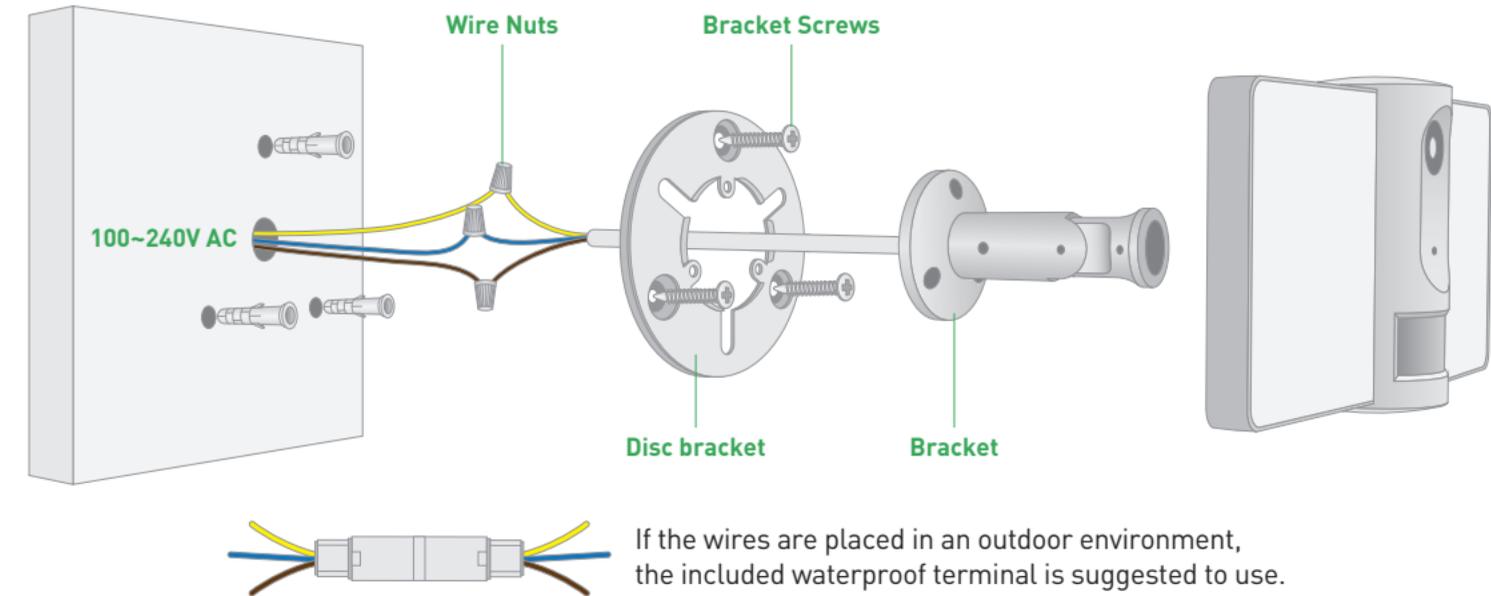

NOTE: Different countries may have different colors for wiring. Please connect the wires of the same color together.

2 Fix the floodlight camera to the disc bracket

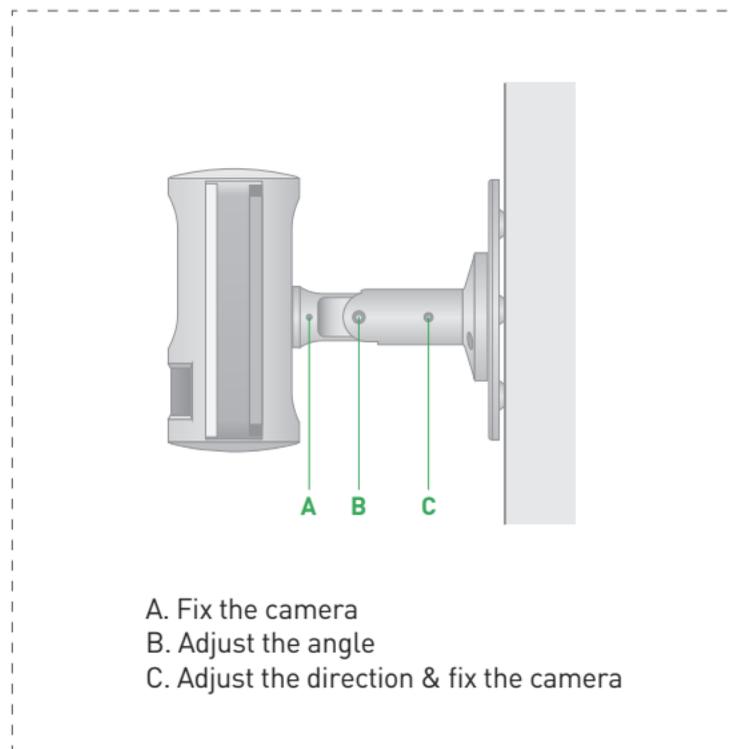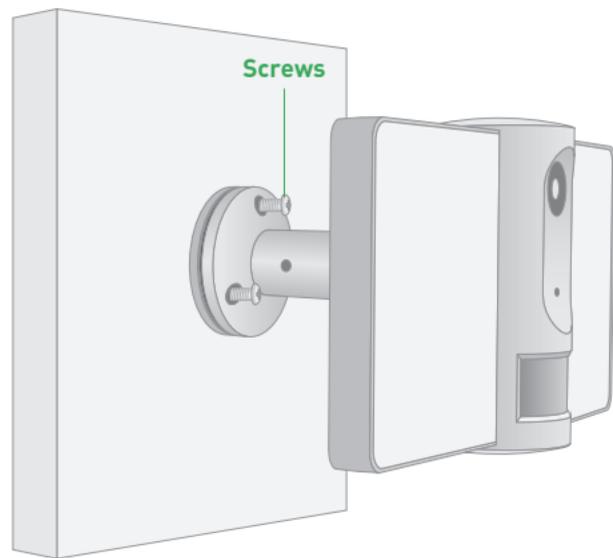

Step 1 Get the App

For the best experience, download the **Homeguardone** app for your smartphone by scanning the QR code below or searching for "Homeguardone" in the app store or Google play.



Step 2 Set up router

This product only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as ~!@#\$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.




Notices before adding the device:


1. Please follow the instructions and make sure the password is inputted correctly.
2. One device can only be added with one App account, if the device has been added with another account already, then it can't be added to any another account again.

Step 3 Account Register

- 1 Open the Homeguardone App, click '**SIGN UP**', input a valid email address and select 'registration means agreement with user agreement privacy agreement' then click '**NEXT**'.

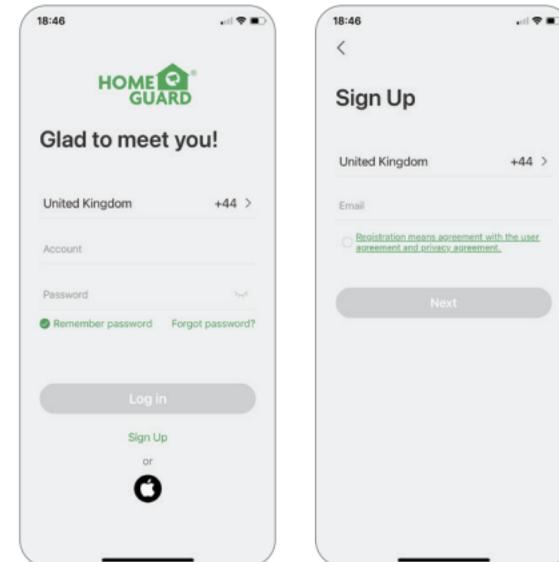


- 2 Create a nickname and login password, click "**Done**".
Note: Make sure your router, device, and mobile phone are nearby.

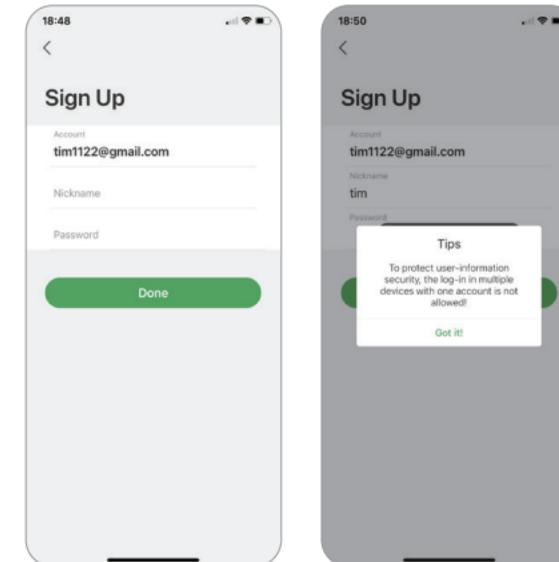


Step 4 QR Code Configuration


- 1 Open the Homeguardone App, click '+', and select the type of device to add.

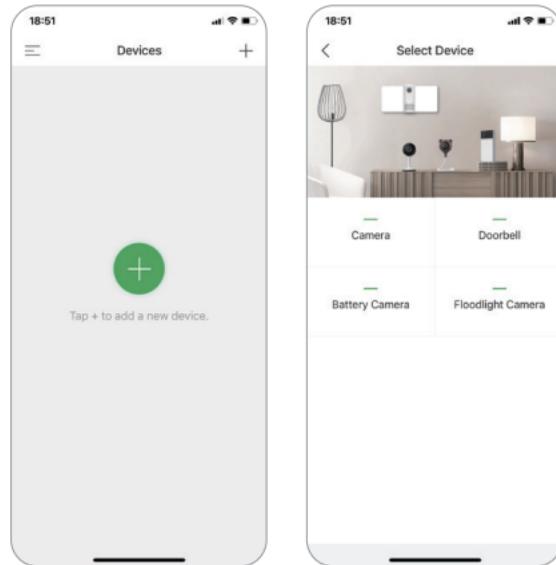


- 2 Please confirm the red LED light blinks, if not, please reset the device and wait for a flashing RED indicator light, click 'Next'. Then input the wireless password, click 'Next'.

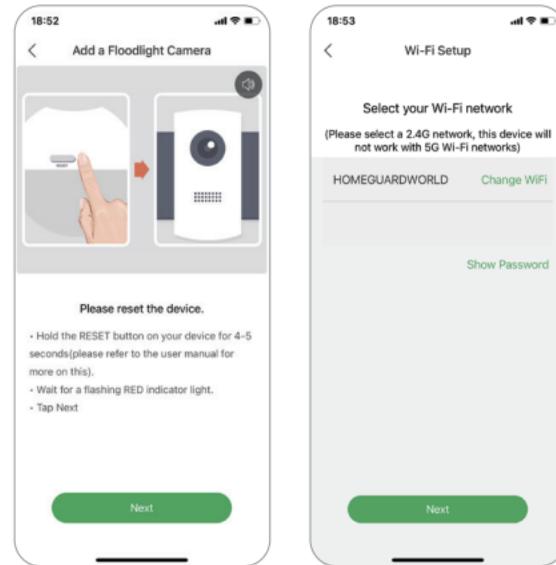


- 3 The device is scanning the QR code at a distance of 15~25cm, click 'Next' to view the scanning mode. After the device scans successfully, click 'Next', the App will automatically add the scanned device.

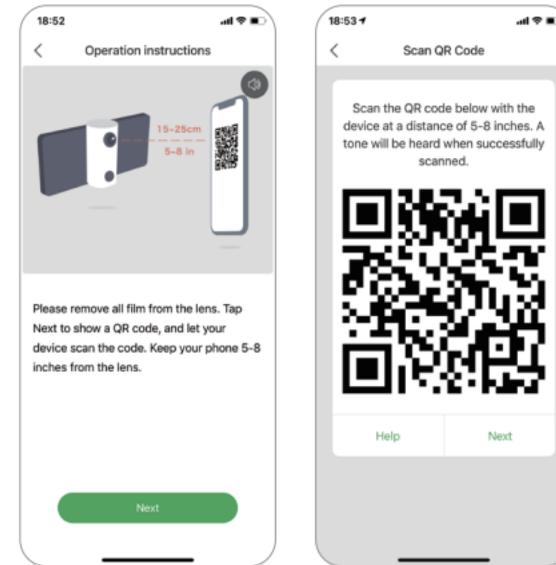

- 4 After the configuration is completed, name the camera & complete the guide of camera installation (Remind: long press the image to be previewed to remove the device, add device again to reset the device)

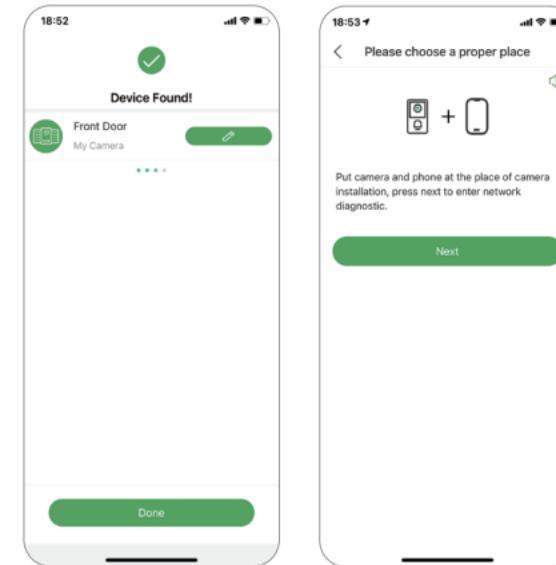

Home Page

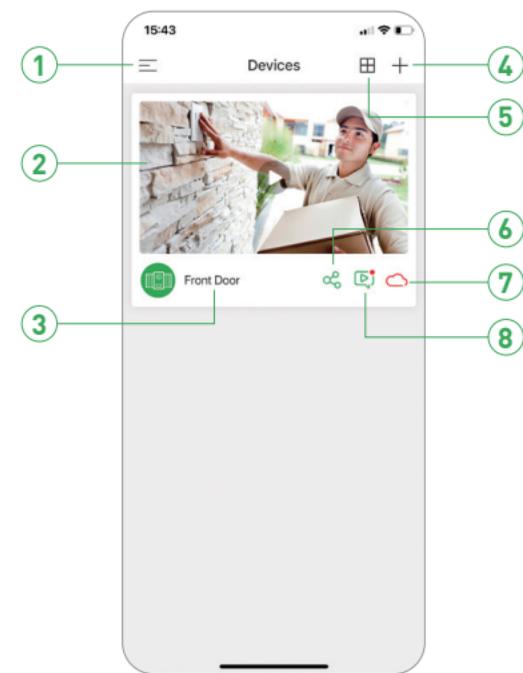

- | | | |
|---|---------------------|---|
| ① | Main Menu | Tap to access main menu |
| ② | Live Video | Tap to start live view |
| ③ | Device name | Displays the camera name |
| ④ | Add Device | Tap to add a new camera |
| ⑤ | Split-screen | Tap to access Split-screen view |
| ⑥ | Share Device | Tap to share the camera to others |
| ⑦ | Cloud | Tap to play the recorded video in the cloud |
| ⑧ | Replay | Tap to play the recorded video in the memory card |

Live View



- | | | |
|---|-------------------------|---|
| ① | Setting | Tap to access camera setting |
| ② | Mute / Unmute | Tap to hear the camera or unmute |
| ③ | Resolution | Tap to change video quality levels |
| ④ | Full screen | Click to view in full screen |
| ⑤ | Live view | Tap to the live view interface |
| ⑥ | History | Tap to play the recorded video in the memory card |
| ⑦ | Cloud | Tap to play the recorded video in the cloud |
| ⑧ | Motion Detection | Turn the motion detection on or off |
| ⑨ | Album | Browse videos or images recorded locally |
| ⑩ | Record | Saves video clip from a live video |
| ⑪ | Capture | Saves images captured from a live video |
| ⑫ | 2-way talk | Activate the microphone to enable 2-way talk |
| ⑬ | Mute / Unmute | Tap to hear the camera or unmute |

FAQ

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the camera, and must be deleted by the App.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Specifications



Item	Description
Camera	1080p Full HD Video Recording, 135° Wide Angle Lens
Resolution	1920 × 1080
Video	H.264, 1920 × 1080@15fps
Audio	Built-in Microphone & Speaker
Image Sensor	1/2.9" 2 Megapixel CMOS Sensor, f=2.8mm, F=2.0
PIR Detection Rangle & Angle	Range: 12m (.Max), Angle: 120°
Floodlight	12.5 W x 2, 6000K, 2100 lm max (adjustable)
Motion Detection	PIR motion sensor, Human detection
Night Vision	Up to 33ft/10m
Storage	Built-in microSD Socket (max 128 GB), Cloud Storage
Power Supply	AC 100~240V, <32W
Wireless	2.4G WIFI (IEEE802.11b/g/n)
Security Protocols	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Dimensions / Weight	260mm × 140mm × 132mm / 640g
Ingress protection	IP65
Operating temperature	-20 °C to 50 °C